

# SWIT®

## COB-LED Fresnel Light

60W Super Bright / 15°-60° adjust / DMX control

**FL-C60D**



### Super High Intensity




| Distance  | 1 meter   | 2 meters | 3 meters |
|-----------|-----------|----------|----------|
| 15° Spot  | 25000 Lux | 6250 Lux | 2700 Lux |
| 60° Flood | 4000 Lux  | 1000 Lux | 445Lux   |

■ Spot angle of Electronic adjustments by Knob or DMX




### Rear Interfaces

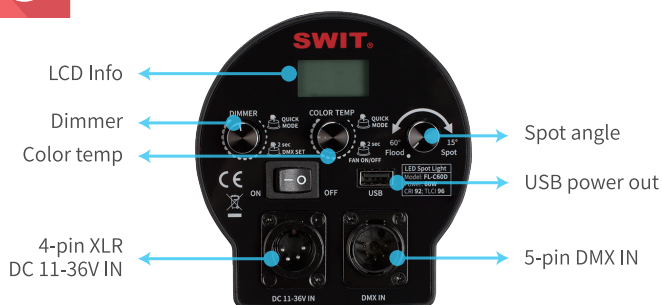


| Knob       | Dimmer           | Color Temp                                          |
|------------|------------------|-----------------------------------------------------|
| Default    | 1% fine adjust   | 2700K-8000K continuously<br>100K fine adjust        |
| Press down | 10% quick adjust | 2700K/3200K/4500K/5600K<br>6500K/7200K/8000K switch |
| Long Press | DMX address set  | Fan ON/OFF switch                                   |



### Accurate Color

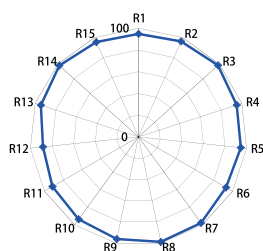

CRI Ra = 95

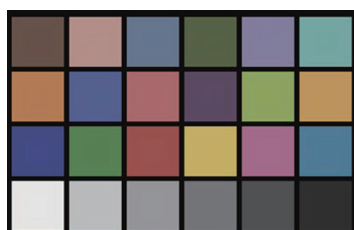

TLCI = 97



### Accessories



S-7200A / S-7200S  
Gold Mount / V-mount plate  
with light stand clamp  
and D-tap output



S-7101  
D-tap to 4-pin XLR DC cable



AC to 4-pin XLR DC Adaptor

SWIT Electronics Co., Ltd.  
+86-25-85805753  
<http://www.swit.cc>  
Email: [contact@swit.cc](mailto:contact@swit.cc)

SWIT Electronics America, Inc  
1-(408)260-8258  
<http://www.switusa.com>  
Email: [info@swit.us](mailto:info@swit.us)

SWIT Electronics Europe GmbH  
+49(0)20659799339  
<http://www.swit-europe.com>  
Email: [info@swit-europe.com](mailto:info@swit-europe.com)



Facebook Page



Instagram